

**NTG 2.5 MOST Adapter**  
**Software version 1.0.2**  
**User and installation manual**

### Appointment

NTG2.5 Most Adapter Module (further module) is designed for installation in cars Mercedes Benz ML W164, GL X164, R T251 released until 2009, equipped by amplifier Harmann Becker when replacing head unit MCSII with head unit Comand NTG2.5. The module intended for protocol transformation to format compatible with the old type amplifier.

### Connection

Module appearance and the power connector pinout is shown on Figure 1. Module is powered from vehicle on-board 12V DC voltage network. The module is connected to the existing gap between the MOST bus car head unit and amplifier. To ensure reliable operation of the system, it is recommended to remove all incompatible MOST bus old-style devices and make connection to the optical ring as shown on Figure 2.

If there is no sound after installation and assembly of the optical ring, you must reset the head unit by pressing and long holding (more than 8 seconds) power button "On" command.



Figure 1. Module appearance.

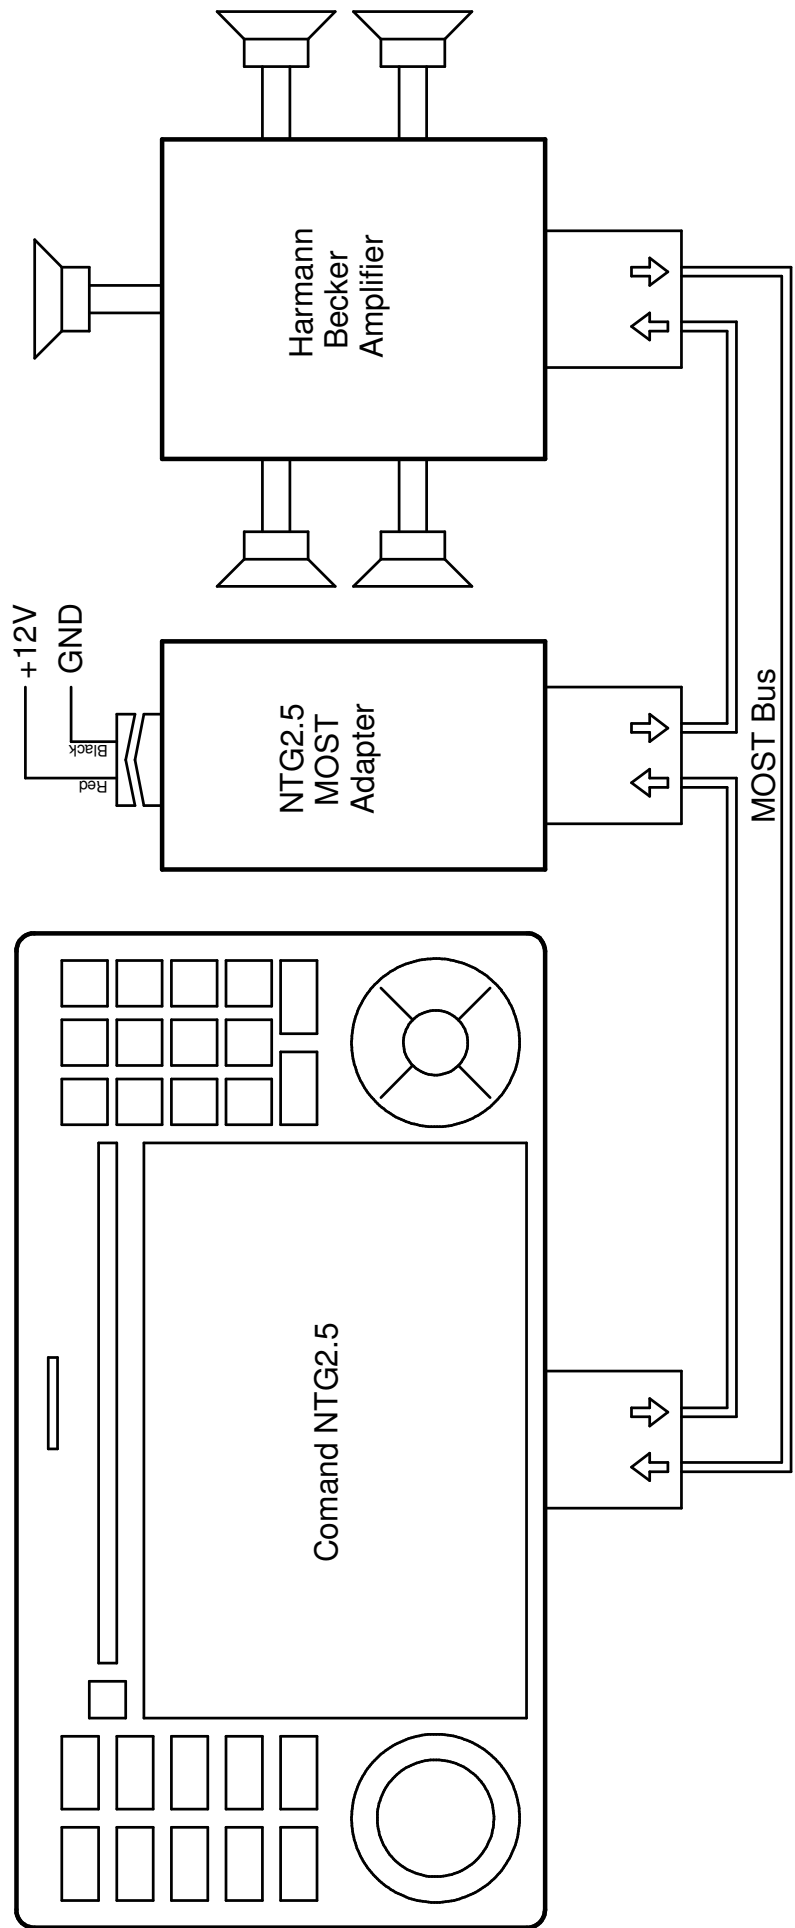


Figure 2. Recommended MOST Configuration